


CATEGORY DEFINITION

Non-woven surface finishing flap wheels are an ideal choice for a wide variety of blending and finishing applications common in the metal fabrication, welding and polishing industries. Flap wheels are conformable to intricate shapes and contours. Designed to deliver a consistent finish with a uniform rate of cut, flap wheels wear away continually exposing fresh abrasives.

There are two types of non woven flap wheels: non-woven only abrasive flaps where finishing is the primary application, and interleaf with alternating cloth and non-woven abrasive flaps (less conformable, more aggressive) for stock removal and finishing. Interleaf flap wheels must always be run in the direction indicated by the arrow.


- APPLICATIONS: Used for a wide range of metal fabrication and welding applications including blending, deburring, cleaning, finishing, and polishing
- SIZE RANGE: Flap wheels with mounted steel shanks: 2" – 3" diameter
Flap wheels with arbor holes: 3" – 12" diameter
- GRIT RANGE: 50 – 320
- ABRASIVE GRAIN: Aluminum Oxide, Silicon Carbide

APPLICATION/GRIT RECOMMENDATION GUIDE

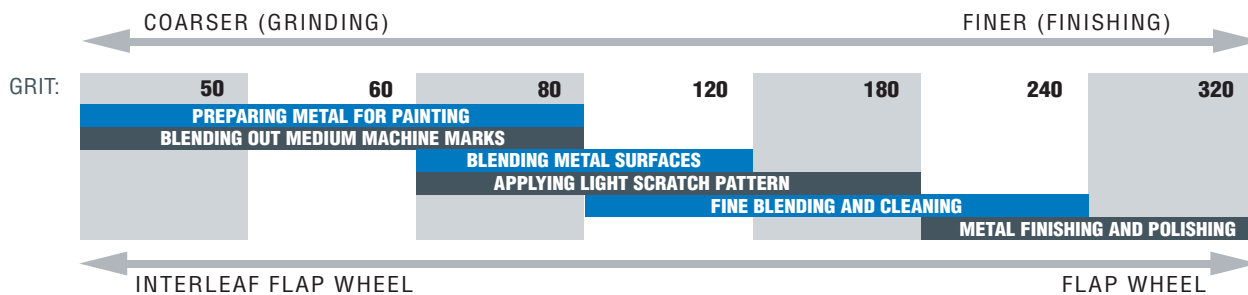

1/4" Mounted Steel Shanks

AVAILABILITY



TIER:

BRAND:

TRADENAME:

BETTER	GOOD	BETTER	GOOD
Norton	Merit	Norton	Merit
INTERLEAF	INTERLEAF	NON-WOVEN	NON-WOVEN

SIZE (D X W X SK.)	MAX. RPM	ABRASIVE	CA GRIT	NON-WOVEN GRIT	STD. PKG.	PART NO.	PART NO.	PART NO.	PART NO.
2 x 1 x 1/4	12,000	A/O	60	Coarse	10	66261051720*	08834138122	66261051716*	66261189992*
		A/O	80	Medium		66261051721*	08834138123		
		A/O	120	Medium		66261051722*	08834144457		
		A/O	180	Fine		08834144458			
		A/O	320	Very Fine		08834144459			
2 x 1-1/2 x 1/4	12,000	A/O	60	Coarse	10		08834138124	66261051717*	69957399202*
		A/O	80	Medium		08834138125			
		A/O	120	Medium		08834138126			
		A/O	180	Fine		08834138127			
		A/O	320	Very Fine		08834138128			
3 x 1 x 1/4	12,000	A/O	60	Coarse	10	66261051725*	08834138129	66261051718*	08834131921
		A/O	80	Medium			08834138130		
		A/O	120	Medium			08834138118		
		A/O	180	Fine			08834138120		
		A/O	–	Very Fine			08834138119		
3 x 1-3/4 x 1/4	12,000	A/O	–	Medium	10			66261051719*	66261189993
		A/O	–	Very Fine					
3 x 2 x 1/4	8,000	A/O	60	Grit	10		08834131338	66261058474	
		A/O	80	Coarse			08834138116		
		A/O	120	Medium			08834144460		
		A/O	180	Medium			08834144461		
4 x 2 x 1/4	12,000	A/O	80	Coarse	10		08834121115		
		A/O	120	Medium			08834120458		

*STANDARD PACKAGE QUANTITY = 20



Arbor Hole Mounts

AVAILABILITY



TIER:

BRAND:

TRADENAME:



Norton	Merit	Norton	Merit
INTERLEAF	INTERLEAF	NON-WOVEN	NON-WOVEN

SIZE (D X W X H)	MAX. RPM	ABRASIVE	CA GRIT	NON-WOVEN GRIT	STD. PKG.	PART NO.	PART NO.	PART NO.	PART NO.
3 x 2 x 3/8	12,000	A/O	50	Coarse	10		08834139022 08834139000 08834139002 08834139001 08834139023 08834139028 08834139024		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	180	Fine					
		A/O	240	Very Fine					
		A/O	320	Very Fine					
4 x 2 x 5/8	12,000	A/O	50	Coarse	10		08834126024 08834126025 08834126026 08834126016 08834126015 08834126014 08834126027		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	180	Fine					
		A/O	240	Very Fine					
		A/O	320	Very Fine					
6 x 1 x 1	6,000	A/O	50	Coarse	10		08834126028 08834126029 08834126000 08834126006 08834126046 08834126068 08834126030 08834126031		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	150	Medium					
		A/O	180	Fine					
		A/O	240	Very Fine					
A/O	320	Very Fine							
6 x 1 x 2	3,000	A/O	80	Medium	4	66261004418 66261007678 66261005387		66261058456 66261058487 66261058451 66261058450	05539512667 05539562635 05539512660 05539512658
		A/O	120	Medium					
		A/O	180	Fine					
		S/C	-	Fine					
		S/C	-	Very Fine					
6 x 2 x 1	6,000	A/O	50	Coarse	10		08834126032 08834126008 08834126009 08834126010 08834126069 08834126018 08834126017 08834126033		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	150	Medium					
		A/O	180	Fine					
		A/O	240	Very Fine					
A/O	320	Very Fine							
6 x 3 x 1	6,000	A/O	50	Coarse	6		08834126053 08834126054 08834126055 08834126056 08834126048 08834126047 08834126057		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	180	Fine					
		A/O	240	Very Fine					
		A/O	320	Very Fine					
8 x 1 x 3	2,500	A/O	120	Medium	3	66261010711		66261058491	05539527460
			-	Fine					
8 x 2 x 1	4,500	A/O	60	Coarse	6		08834126041 08834126042 08834126043 08834126044		
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	180	Fine					
8 x 2 x 3	2,500	A/O	-	Medium	2			66261000889 66261058493	05539512677 05539526627
		A/O	-	Medium					
		A/O	-	Fine					
8 x 3 x 1	4,500	A/O	50	Coarse	3		08834126060 08834126066 08834126061 08834122398 08834126062 08834126064		
		A/O	60	Coarse					
		A/O	80	Medium					
		A/O	120	Medium					
		A/O	180	Fine					
		A/O	320	Very Fine					
12 x 1 x 5	1,900	A/O	80	Medium	2	66261010712 66261004667			
		A/O	120	Medium					
12 x 2 x 5	1,900	A/O	-	Medium	1			66261005070	05539528945 05539562637
		A/O	-	High Strength					

Refer to Non-Woven Convolute Wheel section for Flap Wheel Reducing Bushings.





MERIT